

가
FG 110

- 가 ppm, %vol
or %LEL



	semiconductor sensor
	4 , LCD, 50*36mm
	2 () - 5 , 7
	2 () - 5 , 16
	330 mm
	ABS , IP 54
	5
	Directives CEM 2004/108/CE and NF EN 61010-1
	4 batteries AAA LR03 1.5 V
	20
	Neutral Gas
	From 0 to +50 °C
	From -20 to +80 °C
	0 ~ 120 가
	295 g


		1	
CH₄			
ppm	From 0 to 10000 ppm		1 ppm
%vol	(LPG : 0-1800)	20% of full scale	0.001%vol
%LEL	From 0 to 1% vol 0 to 20%LEL		0.01% LEL

*All the accuracies indicated in this technical datasheet were stated in laboratory conditions, and can be guaranteed for measurements carried out in the same conditions, or carried out with calibration compensation

%LEL : is the limiting concentrations of gas (in air) that is needed for the gas to ignite and explode.

%VOL : is the limiting concentrations of gas (in air) that is needed for the gas to ignite and explode expressed in percentage of volume in air.

• 가 가 (CH4)
LPG (,)
가 가 ()
•
•
• 1000 10000 PPM
• ,
•

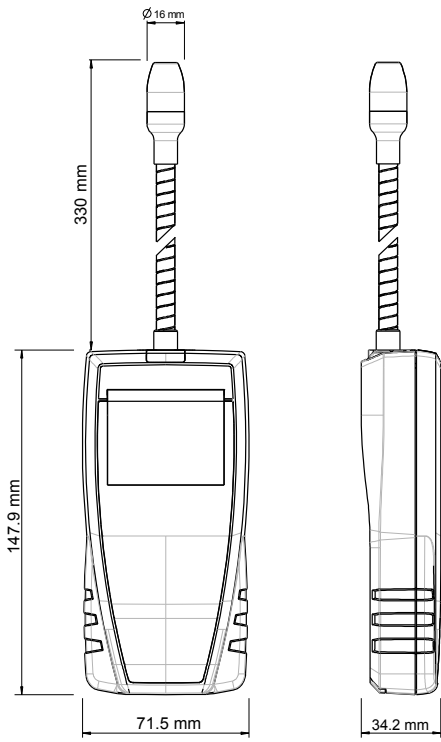

(02-338-0023)

가

1



CQ 15 :

가

MT 51 : ABS

Distributed by :

www.kimo.fr



EXPORT DEPARTMENT
Tel : + 33. 1. 60. 06. 69. 25 - Fax : + 33. 1. 60. 06. 69. 29
e-mail : export@kimo.fr